




KFY MANUFACTURING MEXICO LIMITED

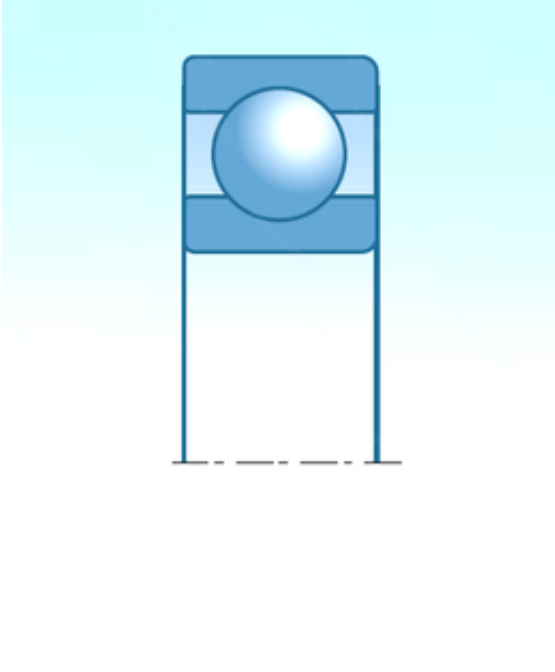

63312LLB Bearing 2D drawings and 3D CAD models

60,000 mm x 130,000 mm x 53,975 mm NTN
63312LLB deep groove ball bearings

Bearing No. 63312LLB

Size	60x130x53.975 mm
Bore Diameter	60,000 mm
Outer Diameter	130,000 mm
Width	53,975 mm
d	60,000 mm
D	130,000 mm
B	53,975 mm
C	53,975 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	2.99
Product Group	B00308
Enclosure	2 Seals
Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Non-Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	60MM Bore; 130MM



KFY MANUFACTURING MEXICO LIMITED

	Outside Diameter; 53.98MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Ca
Other Features	Deep Groove Cartridge Type Non-Friction Nitrile Rubber Seal
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Manufacturer Item Number	63312LLB
Weight / LBS	6.592
Bore	2.362 Inch 60 Millimeter
Outside Diameter	5.118 Inch 130 Millimeter
Inner Race Width	0 Inch 0 Millimeter
Outer Race Width	2.125 Inch 53.98 Millimeter
bore diameter:	60 mm
static load capacity:	52000 N
outside diameter:	130 mm
precision rating:	ISO Class 0
overall width:	54 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot



KFY MANUFACTURING MEXICO LIMITED

inner ring width:	54 mm
snap ring included:	Without Snap Ring
outer ring width:	54 mm
internal clearance:	CN
maximum rpm (grease):	5400 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	2.1 mm
dynamic load capacity:	82000 N
manufacturer product page:	Click here