




KFY MANUFACTURING MEXICO LIMITED

32 mm x 65 mm x 17 mm NTN 62/32LLU deep groove ball bearings

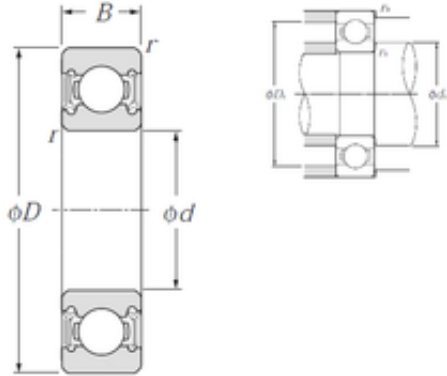

Bearing No. 62/32LLU

62/32LLU Bearing 2D drawings and 3D CAD models

Size	32x65x17 mm
Bore Diameter	32 mm
Outer Diameter	65 mm
Width	17 mm
d	32 mm
D	65 mm
B	17 mm
C	17 mm
r min.	1 mm
da min.	37 mm
da max	40 mm
Da max.	60 mm
ra max.	1 mm
Weight	0,226 Kg
Basic dynamic load rating (C)	20,7 kN
Basic static load rating (C0)	11,6 kN
Reference speed	7 100 r/min
Category	Single Row Ball Bearings
Inventory	1.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	0
EAN	4547359553826
Product Group	B00308
Enclosure	2 Seals



KFY MANUFACTURING MEXICO LIMITED

Precision Class	ABEC 1 ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Enclosure Type	Contact Seal
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	32MM Bore; 65MM Outside Diameter; 17MM Outer Race Width; 2 Seals; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage;
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	http://www.ntnamerica.com
Weight / LBS	0.496
Outside Diameter	2.559 Inch 65 Millimeter
Bore	1.26 Inch 32 Millimeter
Outer Race Width	0.669 Inch 17 Millimeter
Inner Race Width	0 Inch 0 Millimeter
bore diameter:	32 mm
static load capacity:	11600 N
outside diameter:	65 mm



KFY MANUFACTURING MEXICO LIMITED

precision rating:	ISO Class 0
overall width:	17 mm
finish/coating:	Uncoated
bore type:	Round
bearing material:	High Carbon Chrome Steel
closure type:	Double Sealed
cage material:	Steel
row type & fill slot:	Single Row Non-Fill Slot
inner ring width:	17 mm
snap ring included:	Without Snap Ring
outer ring width:	17 mm
internal clearance:	CN
maximum rpm (grease):	7100 rpm
operating temperature range:	-40 to 120 ° C
fillet radius:	1 mm
dynamic load capacity:	20700 N
manufacturer product page:	Click here